


CLAP 2014

Design Patricia Urquiola

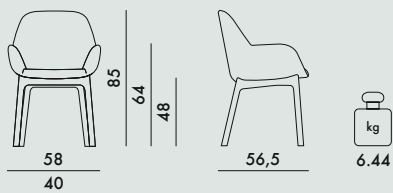

FRAME

Mass-dyed thermoplastic technopolymer

SEAT

Fabric-covered polyurethane

4182

Embossed fabric




Fire tested version

IT UNI 9175, EN1021 fire reaction test class 1 IM ministerial certification
MI1848D20D11M00018

US - California Standard TB 117 - UK Standard BS 7176 Medium Hazard - S.I. 1324

4182

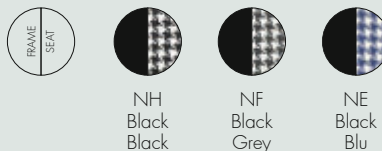

4180




TC
Customer
fabric

In order to better satisfy the needs of common areas, Clap is also available in a personalised version with fabrics provided by the client, for orders of at least 4 items.


Dimensions of customised fabric to cover a single piece: 140x125 cm.

EN 1022:2005	Compliant
EN 16139:2013	Compliant
EN 1728:2012	level attained
6.4	(maximum level) L2
6.5	(maximum level) L2
6.6	(maximum level) L2
6.10	(maximum level) L2
6.11	(maximum level) L2
6.15	(maximum level) L2
6.16	(maximum level) L2
6.17	(maximum level) L2
6.18	(maximum level) L2
6.20	(maximum level) L2
6.24	(maximum level) L2
6.25	(maximum level) L2
6.26	(maximum level) L2




4180/4182	1	6.15	0.161	54X49X61
	1	3.97	0.120	51X51X46

4184

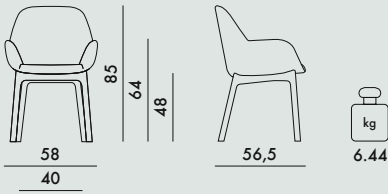

FRAME

Mass-dyed thermoplastic technopolymer

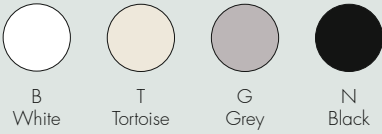


SEAT


Fabric-covered polyurethane foam

COVER

Sanderson fabric



4184



1	6.15	0.161	54X49X61
1	3.97	0.120	51X51X46


EN 1022:2005	Compliant
EN 16139:2013	Compliant
EN 1728:2012	level attained
6.4	(maximum level) L2
6.5	(maximum level) L2
6.6	(maximum level) L2
6.10	(maximum level) L2
6.11	(maximum level) L2
6.15	(maximum level) L2
6.16	(maximum level) L2
6.17	(maximum level) L2
6.18	(maximum level) L2
6.20	(maximum level) L2
6.24	(maximum level) L2
6.25	(maximum level) L2
6.26	(maximum level) L2

CLAP 2020

Design Patricia Urquiola




4187

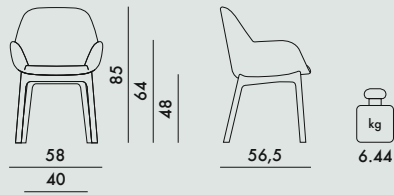

FRAME

Mass-dyed thermoplastic technopolymer

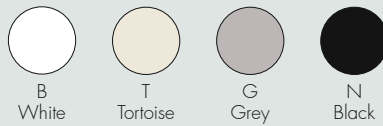

SEAT


Aquaclean® fabric



This ecological fabric has a structure designed to simplify cleaning and strength, reducing the risk of accidental tearing sometimes caused by our pets. It is also subject to Safe Front treatment, which prevents the proliferation of bacteria and dust mites.




EN 1022:2005	Compliant
EN 16139:2013	Compliant
EN 1728:2012	level attained
6.4	(maximum level) L2
6.5	(maximum level) L2
6.6	(maximum level) L2
6.10	(maximum level) L2
6.11	(maximum level) L2
6.15	(maximum level) L2
6.16	(maximum level) L2
6.17	(maximum level) L2
6.18	(maximum level) L2
6.20	(maximum level) L2
6.24	(maximum level) L2
6.25	(maximum level) L2
6.26	(maximum level) L2



4187	1	6.15	0.161	54X49X61
	1	3.97	0.120	51X51X46

4183 

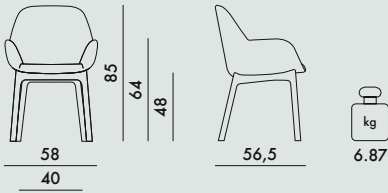

FRAME

Mass-dyed thermoplastic technopolymer



SEAT

PVC-coated fabric




Fire tested version

IT UNI 9175, EN1021 fire reaction test class 1 IM ministerial certification
 MI1848D20D1IM00021
 UK Standard BS 7176 Medium Hazard - S.I. 1324
 US - California Standard TB 117



EN 1022 2005	Compliant
EN 16139 2013	Compliant
EN 1728:2012	level reached
6.4	(maximum level) L2
6.5	(maximum level) L2
6.6	(maximum level) L2
6.10	(maximum level) L2
6.11	(maximum level) L2
6.15	(maximum level) L2
6.16	(maximum level) L2
6.17	(maximum level) L2
6.18	(maximum level) L2
6.20	(maximum level) L2
6.24	(maximum level) L2
6.25	(maximum level) L2
6.26	(maximum level) L2



4183

1	6.73	0.161	54X49X61
1	3.97	0.120	51X51X46